

MANIFOLD CABINETS

PRODUCT OVERVIEW


On-wall manifold cabinet



In-wall manifold cabinet



Manifold cabinet showing manifold unit

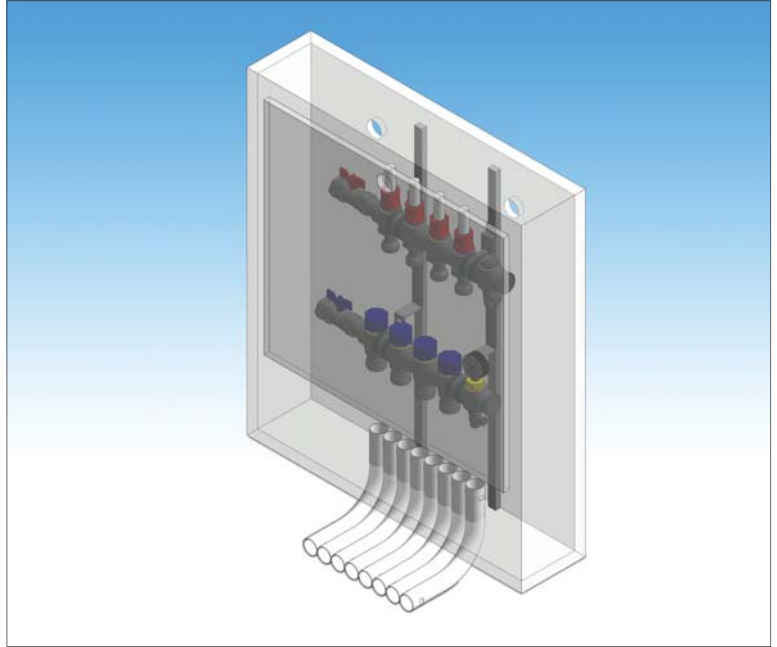

Cabinets are supplied complete and finished in white enamel lacquer finish which does not require any further decoration. If required, the door section can be repainted by others to match specific colour schemes. The backplate is fitted with full length rails to accommodate the floor mixing unit manifold brackets, complete with integral pumpsets. Main flow and return connections can be brought in from the top or bottom through 'knockouts' provided or holes can be cut to provide other entry points, including from the rear side. Each cabinet is fitted with a roll bar at the bottom to facilitate the entry

of pipes connecting to the manifold. The door section has a built in telescopic action to allow for variations in wall thickness and any plaster rendering or plasterboard applied to the wall. Telescopic feet allow for height adjustments. Cabinets are usually mounted directly onto the structural slab and there is sufficient height below the door section to allow for floor construction heights up to 130mm. For floors of a greater depth the cabinet should be raised from the floor by packing or fixing the cabinet to the wall at the required height.

MANIFOLD CABINET SIZES

On-wall manifold cabinet: 120mm Brick thickness suitable for 1 ¼" manifold. Quarter turn latch opening.		
Width (mm)	Height (mm)	Depth (mm)
560	650	130
760	650	130
910	650	130
1060	650	130
1260	650	130
In-wall manifold cabinet: 120mm Brick thickness suitable for 1 ¼" manifold. Quarter turn latch opening.		
540	630	110 expands to 130
740	630	110 expands to 130
890	630	110 expands to 130
1040	630	110 expands to 130

Key latch: optional extra on in-wall cabinets only.

All manifolds are supplied complete with cover

All dimensions in mm. All dimensions are external.